



RSH-300



Roll to Roll Slot-die Coating / Gravure Printing

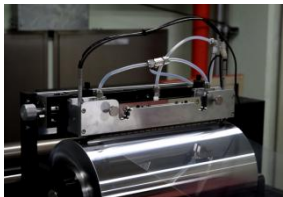

Slot-die Coater

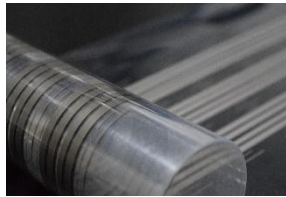


Coating sample



Application


Specifications

Mask shim thickness	50~300micro
Slot-die width	Max.550mm / 22 inch
Coating width	Max.450mm / 18 inch
Pattern roll size	Ø100mm
Printing size	- Continuity - Width 200mm

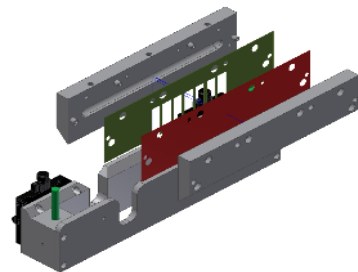

Technical Specifications

Coating speed	0.5 m/sec (normal)
Dry length	14m
Printing speed	0.5 m/sec(normal)
Printing force	50Kg(L)+50Kg(R)=100Kg
Machine size	6000(L)*1100(W)*1400(H)
Machine weight	3000Kg
Power requirement	Main: Single-phase 220V 20A Dry: Single-phase 220V 50A

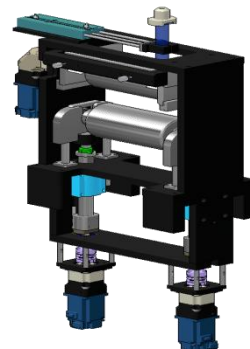

Other sizes available upon request



Please scan this QR code to learn more about the RSH-300.



KIMM Research 8, 171, Jang-dong, Yuseong-gu, Daejeon, 305-343, Korea
Tel. +82.42.863.5118 Fax. +82.42.863.5117 E-mail. sales@pems-korea.com <http://www.pems-korea.com>

